

# STANDARD AFM® / SAND FILTERS

## DCH/P SERIES Ø 415-1260

Ref	ID	Ø D	H	M	A	B	Connections	Filt. Surface	AFM®/SAND Load
212441	DCH/P-415	415	1751	305	260	1261	2"	0,12 m <sup>2</sup>	175/230 Kg
212446	DCH/P-460	460	1762	305	260	1272	2"	0,16 m <sup>2</sup>	225/285 Kg
212452	DCH/P-520	520	1782	305	300	1237	2"	0,20 m <sup>2</sup>	300/365 Kg
212464	DCH/P-640	640	1836	355	338	1229	2"	0,30 m <sup>2</sup>	450/555 Kg
212472	DCH/P-720	720	1985	355	405	1275	2"	0,40 m <sup>2</sup>	575/710 Kg
212484	DCH/P-840	840	2070	355	430	1300	2 ½"	0,52 m <sup>2</sup>	750/940 Kg
212496	DCH/P-960	960	2138	420	445	1373	2 ½"	0,70 m <sup>2</sup>	1000/1265 Kg
212410	DCH/P-1010	1010	2000	420	425	960	DN 80	0,80 m <sup>2</sup>	1125/1395 Kg
212412	DCH/P-1260	1260	2070	420	455	935	DN 100	1,20 m <sup>2</sup>	1750/1820 Kg


### DCH/P SERIES 1200 BED HEIGHT

Design pressure 2,5 Kg/cm<sup>2</sup> | Test pressure 3,75 Kg/cm<sup>2</sup>.  
 Lateral access manhole.  
 Nozzle plate steel reinforced filter.  
 Complete nozzle plate reliability.  
 Internal steel reinforced filter.  
 Special diffuser for Sand / AFM®.  
 Female threads (GAS) in GRP are part of the body.  
 Large diameter internal piping designed for both Sand / AFM® requirements.  
 Sight glass.  
 DCH/P 1010 & DCH/P 1260 Flanged connections.


### ADDITIONAL OPTIONS Dimensions in mm.

Additional sight glass.  
 High temperature.  
 Available for higher pressure up to 7 kg/cm<sup>2</sup>.  
 Customizable height.  
 Other flange sizes available.  
 Long vertical sight glass.  
 A2 & B2 connections available. Ask for measures.

TYPE 1

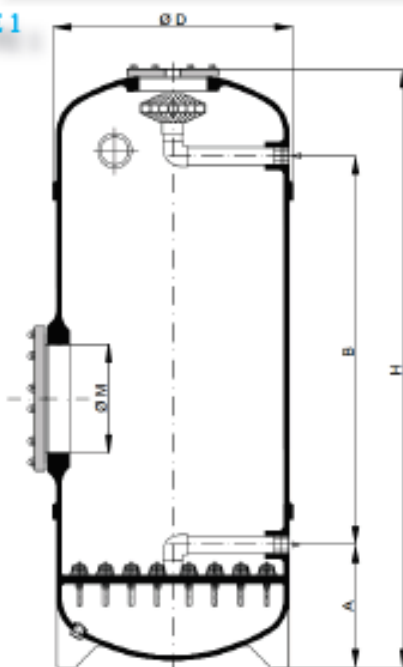

TYPE 2

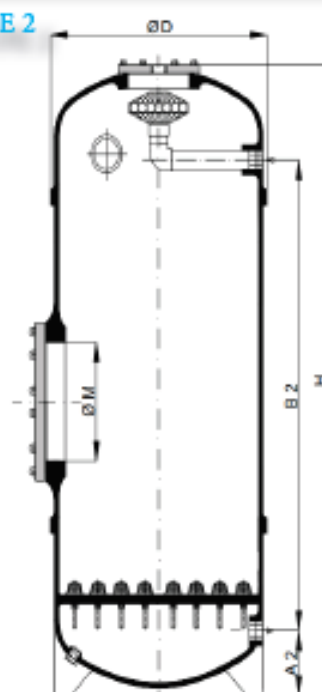

Threaded connections integrated in body

Transparent top lid

Top diffuser

Access manhole

Sight glass

Nozzle plate

Nozzle detail

Drain plug

